



index

1 introduction

pp.

8 who are we

14 our products

3 | retaining brakes

pp.

32 retaining brake FR

34 retaining brake FR sst

38 retaining brake RA

41 accessories FR

42 features FR / RA

5 | sliding bolts

pp.

54 sliding bolts FX

7 | codes

pp.

66 - 69 our products

70 - 73 blue line

2 door closers

PP

18 door closer CH

22 door closer TP

25 accessories CH / TP

26 features CH / TP

4 | antipanic

pp.

46 antipanic AP

48 antipanic PB

50 accessories AP / PB

51 features AP / PB

6 | complements

pp.

58 door selector CO

60 door fixer CO

62 inflatable air wedge CO



8

A family-run business formed by a team whose mission is to manufacture all the Justor products with the highest quality and warranty

Objective: quality assurance, prestige and brand pride

For more than 75 years at **Talleres Trepat S.A.** we have been constantly working to reach the leadership as manufacturers of closing systems for all types of doors.

We design and manufacture all the elements using high-quality materials in aluminum, as well as in iron, stainless steel and/or plastic.

In order to offer our clients the best warranty in terms of durability and quality, each element is always tested at our in-house lab. Moreover, all of our certified products are CE marked under the regulations EN 1154, EN 1125 and EN 1158 that allow their installation on fire doors (FR).



Management System ISO 9001:2015



10












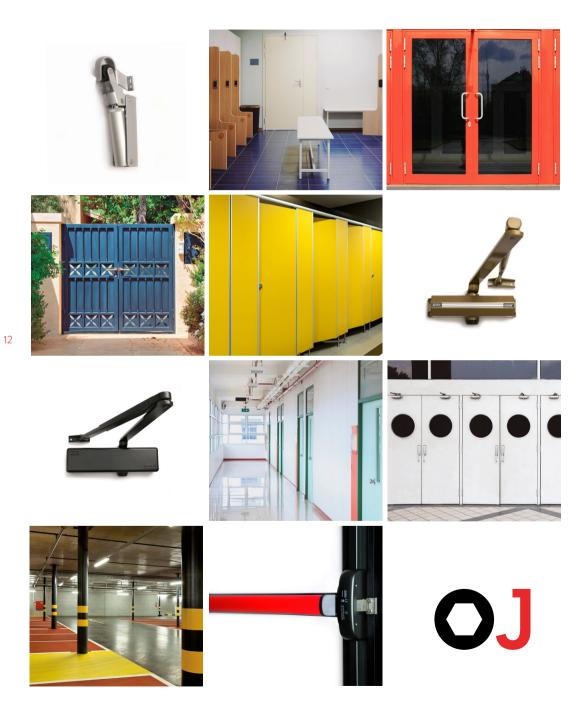

Solutions for all types of doors

At **Justor** we offer all kinds of mechanisms and self-closing devices for every type of door such as door closers, spring hinges and paumelles, retaining brakes, antipanic exit devices and other complements and accessories for doors.

We design and manufacture all our products in Barcelona with the highest quality and warranty. We offer solutions to cover the needs present in such various markets as metal, wood, the food industry, health, aeronautical etc.

Our products

At Justor we design and produce the best solutions for the closing of all types of doors. All of our products meet the highest quality and performance requirements.



Door closers. Available with arm set. Ready to resist frequent and/or intensive usage, on doors up to 120 kg.



Retaining brakes. They prevent doors from slamming and ensure the total and silent closing of the door.



Hinges. Always with a laminated spring set inside, for all types of doors, from screen doors of only 5 kg to swing doors of 60 kg and iron doors of 250 kg.

(ask for our exclusive spring hinges catalogue at: trepatventas@justor.com or at www.justor.com)



Single and double action spring hinges and paumelles

Blue line

We broaden our market offer with products that are entirely manufactured by us. These products comply with our quality and reliability requirements that define all references within our range.



Antipanic. Overlapping mechanisms. 100% reversible. Certified to be installed on fire doors.



Sliding bolts. Sliding bolts and sliding flush bolts for all types of doors, windows and furniture.



Complements. Complementary products for doors and windows. Addressed to the professional field of aluminium and wood.

index door closers

door closers

door closers index

pp.

18 door closer **CH**22 door closer **TP**

accessories CH / TP

Door closers suitable to operate on doors with a lot of traffic.

26 features CH / TP

25



door closer

CH

This high-performance door closer is able to work under the most demanding circumstances. BASIC models are certified according to the EN 1154 norm and with CE marking for its installation on fire doors (FR).





Hann

They can be installed on every surface, on inward and outward openings, as well as in every field, either residential and industrial.

Features


Available in more than 5 finishes. They allow to leave the door open when necessary (models with retention). Adjustable force from EN 1 (20 kg) up to EN 6 (120 kg) according to model. Warranty of 1 million actuations.






CH models and size

MEASURES CH1-2 CH2-3






20

MODELS	Strength (EN)	Door width (cm)	Door weight (kg)	Opening and closing systems	
CH1-2	1	75	20	DACIC / DI	
CITI-2	2	85	40	BASIC / RL	
CH 2 - 3	2	85	40	BASIC** / RL / PR / BC	
CITZ - J	3*	95	60	DASIC / RL/PR/BC	


*EN 1154




Description and opening/closing adjustments at pages 26 / 27.

CH 4 - 5


CH 5 - 6





MODELS	Strength (EN)	Door width (cm)	Door weight (kg)	Opening and closing systems
CH 4 - 5	4*	110	80	BASIC** / PR / FF
CI14-3	5*	125	100	BASIC / PR / FF
CH 5 - 6	5*	125	100	BASIC** / PR / FF
CITO	6*	140	120	DASIC / PR / FF

*EN 1154



Description and opening/closing adjustments at pages 26 / 27.



door closer

TP

Door closer with overcharge valve. Able to exceed 500.000 door cycles. Especially suitable for accesses with high levels of transit.



Uses

It can be installed either on doors with a left and right opening, whenever a soft and safe closing of the door is required.


Features


One model offers solutions to different weights (EN). Load capacity up to 120 kg depending on model. Finished in different colors. Available with one or two valves that allow opening up to 180° and different closing systems.




TP models and size

MEASURES
TP (all the models)





MODELS	Strength (EN)	Door width (cm)	Door weight (kg)	Opening and closing systems
	2	85	40	
TP 2 - 3 - 4	3	95	60	BASIC / PR / FF / TR
	4	110	80	
	4	110	80	
TP 4 - 5 - 6	5	125	100	BASIC / PR / FF / TR
	6	140	120	




Description and opening/closing adjustments at pages 26 / 27.

Accessories CH / TP



arm tube CH 35-95


Recommended for interior installations with outward opening where the frame superimposes the door leaf in between 35 and 95 mm.





arm tube CH 95-155


Recommended for interior installations with outward opening where the frame superimposes the door leaf in between 95 and 155 mm.





arm tube TP 95-175


Recommended for interior installations with outward opening where the frame superimposes the door leaf in between 95 and 175 mm.





lever rod PR 30-80

Recommended for interior installations with outward opening where the frame superimposes the door leaf in between 30 and 80 mm. In the case of models with a retention arm (PR).





glass door U adapter for CH and TP

An U adapter for door closers CH1, CH4 and TP. Allows the product installation on glass doors.





adapted plate TP

Adapted plate TP to be installed on narrow profiles (minimum 25 mm) on doors with an inward opening.



25

We offer the widest range of opening and closing systems of models CH and TP

BASIC



This model always closes the door, regardless of the opening angle.

CH 4 - 5 TP 2 - 3 - 4 CH1-2 CH 2 - 3 CH 5 - 6 TP 4 - 5 - 6










90°

RL (free retention)

The door can be left open from 90°. The door can open until 180°, but the return and closing function does not operate until it reaches the 90°. The interior retention is not adjustable. A perfect model for shops and spaces on the street level.







PR (retention lever)

The exact point at which we want the door to be left open can be chosen. It holds and stops the door when closing from that point onwards. Suitable to ease the access with shopping carts or strollers thanks to the door retention.

(Adjustment details of PR at page 28)







26

CH1-2

CH 2 - 3


FF



Model with 2 adjustment valves. One valve adjusts the closing speed from 180° to 15°, while the other operates from 15° until the total closing of the door. Recommended for installations with regular draughts of air.


door closers

TR




Model with double speed. 2 valves allow to adjust speed from 180° to 80° and from 80° until closing. This door closer is specifically recommended to ease the access for persons with a reduced mobility.

ВС



This model controls the opening from 70°. It dampens the opening in order to avoid undesired blows. Especially recommendable for doors with a 90° maximum opening.

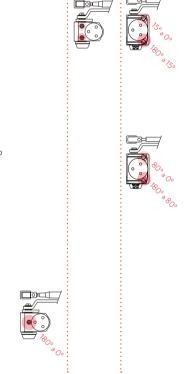


CH 4 - 5


CH 5 - 6

TP 2 - 3 - 4


TP4-5-6


PR lever adjustment





28





Door closers with the PR system (retention arm) can be adjusted to select the exact point in which we want the door to stay open and blocked.


To adjust them we need to follow these 4 essential steps:

- 1 Install the door closer in a standard way (according to model and template).
- 2 Loosen the end of the arm by means of a wrench key until the lever can be moved. Do not remove the screw.
- **3** Put the lever of the arm at the desired retention angle.
- 4 Tighten again the end of the arm making sure that the position of the teeth is the right one.

Final blow regulation for all CH and TP models


There are three different types of arms for Justor door closers. The final strike is always regulated by expanding or reducing the length of the extensible part of the arm.

The longer the extensible part, the stronger the final strike. When the length is reduced, the final strike diminishes in strength.



Shorter

lever



retaining brakes

pp.		
32	retaining brake FR	Retaining avoid door
34	retaining brake FR sst	by draugh the correc the door.
38	retaining brake RA	the door.
41	accessories FR	

Retaining brakes that avoid door slams caused by draughts and ensure the correct closing of the door.



retaining brake

FR

The Justor FR retaining brake eliminates door slams caused by a bad usage of the door or self-closing devices being previously installed. It ensures the total closing of the door.





Head

Neighbourhood communities, sliding doors, paint booths, pressure booths, school doors, greenhouses, doors with electric locks, among others.

Features

It operates in the last 10° ensuring the total closing of the door. Different models for doors from 15 kg to 100 kg. Available in 5 different colours. The closing speed can be fixed or adjustable (G models). More than 250.000 working cycles.









FR retaining brake

retaining brake

FR

The retaining brake eliminates door slams. Manufactured in stainless steel, this tool is designed to work under the most unfavourable weather conditions. It operates in the last 10°, thus ensuring the complete closing of the door.





Uses

Doors in the food industry, industrial refrigerators, accesses to private properties and/or swimming pools, saunas or different traffic areas in the naval sector.

Features

2 models available to suit every need (stainless steel and all stainless steel). Stainless steel components are always manufactured in AISI 304. It operates in the last 10° ensuring the total closing of the door. The closing speed can be fixed or adjustable (G models). Proper installation in the center of the top of the door, although it can also be installed displaced. Two year warranty. More than 250.000 working cycles.





models and size

36

MEASURES FR 0 / FR 0 G FR 1 / FR 1 G


65,5 mm 108,5 mm

MODELS		Strength (N)	Door width (cm)	Door weight (kg)	
FR 0	FR 0 G*	30	75	15	
FR1 I	FR1G*	60	85	40	

^{*}G - adjustable closing speed


FR models and size

MEASURES FR2/FR2G FR3/FR3G

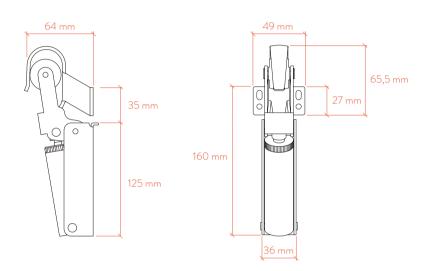

MODELS	Strength (N)	Door width (cm)	Door weight (kg)
FR2 FR2	G* 80	110	80
FR3 FR3	G* 115	125	100

^{*}G -adjustable closing speed

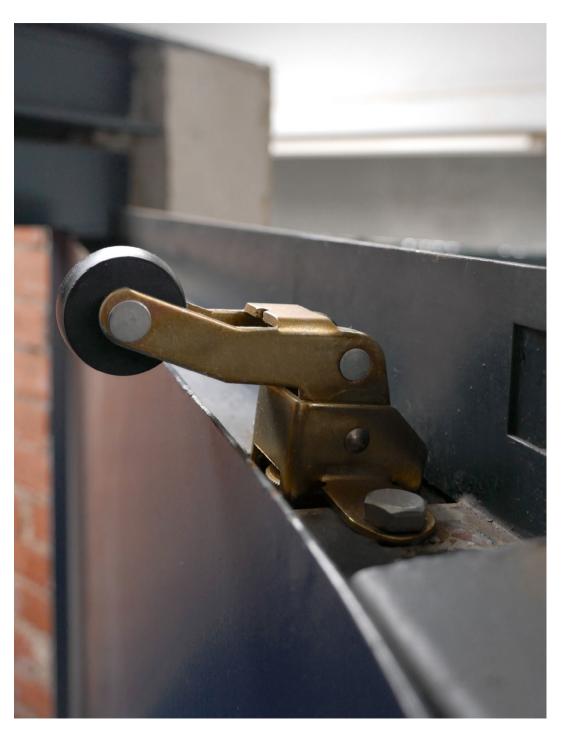

retaining brake for elevator doors

RA

Specific product intended to be installed into the door. Adjustable closing speed. It avoids door slams and ensures a silent and effective closing.





Uses


Suitable for elevator doors in communities, industrial lifts, freight lifts etc.


Features


3 different models depending on the anchor (elliptical, in-line or diagonal anchor). It ensures a silent and effective closing. Load capacity up to 80 kg. More than 250.000 opening and closing cycles.

















MODELS	Strength (N)	Door width (cm)	Door weight (kg)
RA 3 G*	80	110	80
RA 4 G*	80	110	80
RA 7 G*	80	110	80


^{*}G - adjustable closing speed

Accessories FR



standard hook


It is supplied as standard. It works on the same plane as the retaining brake.





short hook

For installations where the frame protrudes slightly from the door.



41



special flat hook

Ideal for situations where the door fits inside the frame. The working range is between 7,5 mm and 24,5 mm.





supplement hook chrome


Enables installation in situations where the wall above the frame is displaced inside 10-27 mm.





hook fitting plate

It allows the retaining brake installation on doors with a narrow frame (minimum 16 mm).





bracket for sliding door

Special accessory to work on sliding doors.



Some considerations on FR, FR G and RA G


Why choose a G model?

The fundamental difference between the basic model and the adjustable model (G) lies in the closing. With the adjustable models we can choose to expand or diminish the closing time in beween 1 and 10 seconds by opening or closing the oil flow.

Adjusting the speed is easy and quick. We can adjust it in only two steps and it can be modified whenever it is necessary.

The G model is especially indicated to be installed in schools, delaying the closure and thus avoiding any fingers to get stuck. Applications in hospitals where doors must close with no sounds and effectively are also highly recommended.

NOT adjustable models





G models






proper installation in the center of the door











easy speed adjustment





index antipanics

antipanics

OJustor

blue line

antipanics index

pp.	
46	antipanic reversible modular AP
48	antipanic reversible push-bar PB
50	accessories AP / PB
 51	features AP / PR

Antipanics certified according to European standard EN 1125 and suitable for fire doors with CE marking. All its components are reversible and combinable to obtain closure of 1, 2 or 3 points.



antipanic reversible modular

AP

Reversible antipanic device. The latch is always made of stainless steel, thus permitting its installation on fire doors (RF). The body of the antipanic device has a compact design of only 12,6 cm of height.





47

Uses

Parking emergency exits, industrial buildings, shopping centers, sports centers, etc.

Features

Bar model. The distance between its anchorage on the door and the farthest point (horizontal bar bracket), is only 8,7 cm. High-sensitivity mechanism, the latch actuates after a pressure of 2 mm. Manufactured for doors up to 2,66 m. It allows to install extensions for higher doors (up to 3 m). Certified with CE EN 1125.




















antipanic reversible push-bar

PB

Reversible antipanic device (PUSH-BAR type). We can take advantage of its reversibility during installation by means of the "one second system".




Uses

Emergency exits in schools, theaters, cinemas, offices or convention centers.

Features

The mounting of the tool is carried out by means of two pieces that create the structure and allow its right functioning. Manufactured for doors up to 2,66 m. It allows to install extensions for higher doors (up to 3 m). Certified with CE EN 1125.





handle outside trim / oval handle outside trim

Handle or oval handle model. Both available with the following mechanisms:

- Open/closed mechanism: it allows to always leave the access from the exterior opened or closed.
- Universal mechanism: it can perform the function of open/closed and unlocking by means of a key (this always implies a blocked access from the outside, being able to access only if you have a key).

Available in white, gray and black.





outer handle

This always implies an open access from the outside.

Available in white, gray and black.








outer cylinder drive

Unlocking by means of a key mechanism. This always implies a blocked access from the outside, being able to access only if you have a key. Access only to authorized personnel.



vertical rods (with vertical or lateral latch bolts)

Mechanisms to add closing points for safety reasons. The vertical latch system can be installed on the passive leaf in accesses with a double door and the lateral one in accesses with one single door. Height up to 2,66 m or extensions up to 3 m.


Available in white, black, gray and steel effect.










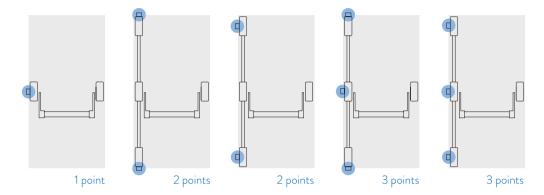

PB

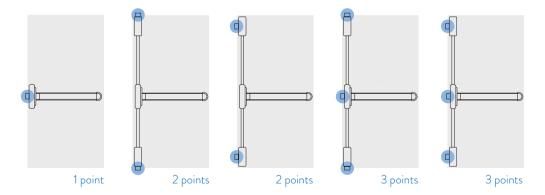

index sliding bolts

sliding bolts

OJustor

blue line

sliding bolts index

pp.

54 sliding bolts **FX**

Sliding bolts and sliding flush bolts for additional needs on single and double doors. Reliable and secure closure.



sliding bolts

FX

Sliding bolts and sliding flush bolts for all types of doors and windows. Suitable for aluminium, wood and metal.






Uses

Double doors in dining rooms, furniture doors, train cars, boats and coaches, etc.


Features

Available in **bright gold, nickel, stainless steel AISI 304** and **stainless steel AISI 316**. The available length measures go from 150 mm to 500 mm, with possibility to offer special measures. Round and straight edge options available.

Sliding bolt



Sliding flush bolt










complements

OJustor

blue line

omplements index

pp.		
58	door selector CO	Complements for additional needs on
60	door fixer CO	single or double doors.
62	inflatable air wedge CO	

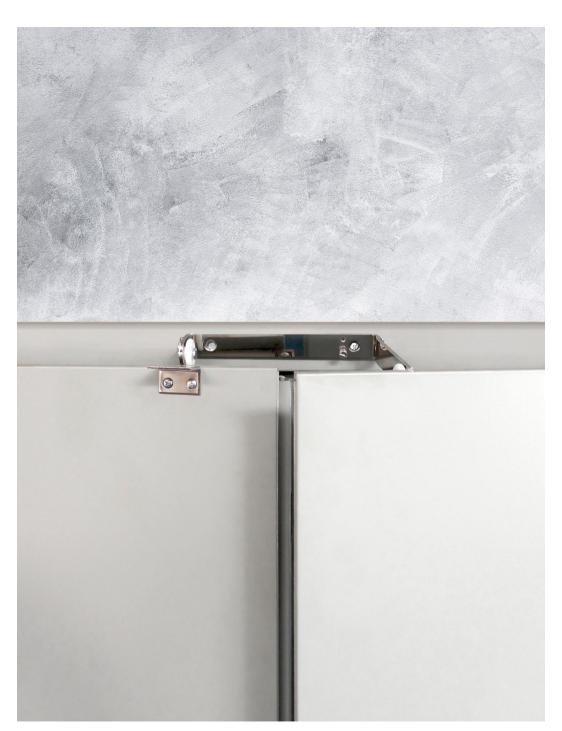

door selector

CO

In accesses with a double door, it always ensures the closing of the passive leaf prior to the active one, thus ensuring a safe and correct closing, this being particularly important on fire doors.





Uses

Double doors in hospitals, sports centers, lifts, emergency exits or fire doors.

Features

Reversible wheel mechanism. Wheels with 30 mm diameter. Adjustable angle bolt. More than 500.000 cycles. Chrome finish. In compliance with EN1158 norm and CE marking.







door fixer

CO

Blocking system with rubber top to leave the door open. Fast blocking activation and deactivation through steel blade.






Uses


All types of interior doors, whether in offices, in community portals, in commercial premises or in industrial buildings.

Features

Manufactured in zamak (zinc alloy with aluminium, copper and magnesium). Polished finish. Direct installation on door with screws. Installation on interior doors.





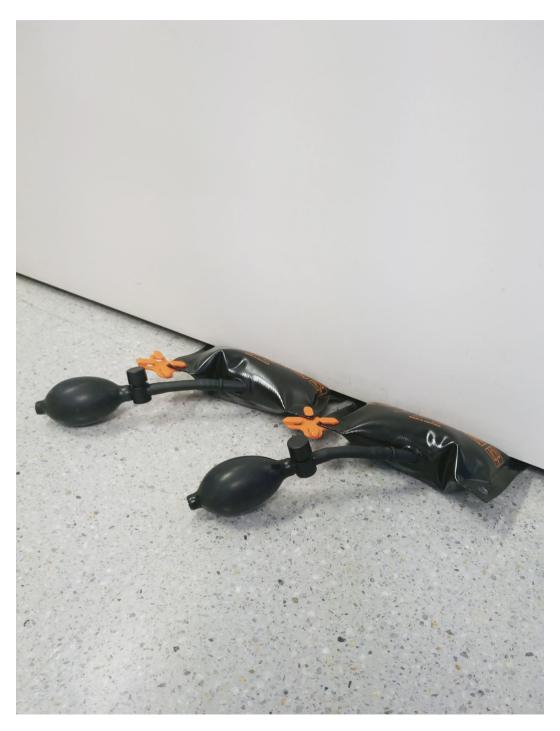

inflatable air wedge

CO

Reinforced fabric airbag for structure levelling/elevation. Unique product in the market with the CONNECT feature that enhances security. Load capacity of 135 kg. Pressure control by means of a valve.





Uses

Installation and levelling of doors, windows, panels, skirting boards etc., complementing or efficiently replacing the traditional wedges and avoiding scratches and damages. It allows to easily install and uninstall doors fitted with paumelles.

Features

Produced with a reinforced fabric and a pressure valve. Its dimensions are 160×160 mm and the maximum born weight is 135 kg per unit. Several units can be put together to support higher weights. It can be used for widths in between 2 and 50 mm. Elevation capacity up to 50 mm on weight support.



index codes

codes

OJustor

codes index

PP.	
66	door closer CH
67	door closer TP
68	retaining brake FR
68	retaining brake RA
69	accessories CH / TP
69	accessories FR
70	antipanic AP
70	antipanic PB
71	accessories AP / PB
71	spare parts AP/PB
72	sliding bolts FX
73	complements CO



66

Door closer CH

Packaging: 6 or 12 units box / 6 units blister

			Box (x1)	Blister (x1)
CH BASIC	CH1-2 BASIC	Silver Gold Bronze White Black SST efect Special	1212.01 1212.02 1212.03 1212.06 1212.09 1212.19 1212.99	1213.01 1213.02 1213.03 1213.06 1213.09 - 1213.99
	CH 2-3 BASIC	Silver Gold Bronze White Black SST efect Special	1312.01 1312.02 1312.03 1312.06 1312.09 1312.19 1312.99	1313.01 1313.02 1313.03 1313.06 1313.09
	CH 4-5 BASIC C€	Silver Gold Bronze White Black SST efect Special	1412.01 1412.02 1412.03 1412.06 1412.09 1412.19 1412.99	1413.01 1413.02 1413.03 1413.06 1413.09
	CH 5-6 BASIC C€	Silver Gold Bronze White Black SST efect Special	1512.01 1512.02 1512.03 1512.06 1512.09 1512.19 1512.99	1513.01 1513.02 1513.03 1513.06 1513.09 - 1513.99
CH RL	CH 1-2 RL CH 2-3	Silver Gold Bronze White Black SST efect Special Silver	1222.01 1222.02 1222.03 1222.06 1222.09 1222.19 1222.99 1322.01	1223.01 1223.02 1223.03 1223.06 1223.09 - 1223.99 1323.01
	RL	Gold Bronze White Black SST efect Special	1322.02 1322.03 1322.06 1322.09 1322.19 1322.99	1323.02 1323.03 1323.06 1323.09 - 1323.99
CH BC	CH 2-3 BC	Silver Gold Bronze White Black SST efect Special	1362.01 1362.02 1362.03 1362.06 1362.09 1362.19 1362.99	1363.01 1363.02 1363.03 1363.06 1363.09 - 1363.99

			Box (x1)	Blister (x1)
CHPR	CH 2-3 PR	Silver Gold Bronze White Black SST efect Special	1332.01 1332.02 1332.03 1332.06 1332.09 1332.19 1332.99	1333.01 1333.02 1333.03 1333.06 1333.09 - 1333.99
	CH 4-5 PR	Silver Gold Bronze White Black SST efect Special	1432.01 1432.02 1432.03 1432.06 1432.09 1432.19 1432.99	1433.01 1433.02 1433.03 1433.06 1433.09 - 1433.99
	CH 5-6 PR	Silver Gold Bronze White Black SST efect Special	1532.01 1532.02 1532.03 1532.06 1532.09 1532.19 1532.99	1533.01 1533.02 1533.03 1533.06 1533.09 - 1533.99
CHE	CH 4-5 FF	Silver Gold Bronze White Black SST efect Special	1452.01 1452.02 1452.03 1452.06 1452.09 1452.19 1452.99	1453.01 1453.02 1453.03 1453.06 1453.09 - 1453.99
	CH 5-6 FF	Silver Gold Bronze White Black SST efect Special	1552.01 1552.02 1552.03 1552.06 1552.09 1552.19 1552.99	1553.01 1553.02 1553.03 1553.06 1553.09 - 1553.99
CH FF-PR	CH 4-5 FF-PR	Silver Gold Bronze White Black SST efect Special	1472.01 1472.02 1472.03 1472.06 1472.09 1472.19 1472.99	1473.01 1473.02 1473.03 1473.06 1473.09 - 1473.99
	CH 5-6 FF-PR	Silver Gold Bronze White Black SST efect Special	1572.01 1572.02 1572.03 1572.06 1572.09 1572.19 1572.99	1573.01 1573.02 1573.03 1573.06 1573.09 - 1573.99



Door closer TP Packaging: 6 units box

			Box (x1)
P BASIC	TP 2-3-4 BASIC	Silver Gold Bronze White	9012.01 9012.02 9012.03 9012.06
		Black Special	9012.09 9012.99
	TP 4-5-6 BASIC	Silver Gold Bronze White Black Special	9512.01 9512.02 9512.03 9512.06 9512.09 9512.99
TP PR	TP 2-3-4 PR	Silver Gold Bronze White Black Special	9032.01 9032.02 9032.03 9032.06 9032.09 9032.99
	TP 4-5-6 PR	Silver Gold Bronze White Black Special	9532.01 9532.02 9532.03 9532.06 9532.09 9532.99
TP TR	TP 2-3-4 TR	Silver Gold Bronze White Black Special	9042.01 9042.02 9042.03 9042.06 9042.09 9042.99
	TP 4-5-6 TR	Silver Gold Bronze White Black Special	9542.01 9542.02 9542.03 9542.06 9542.09 9542.99
TP FF	TP 2-3-4 FF	Silver Gold Bronze White Black Special	9052.01 9052.02 9052.03 9052.06 9052.09 9052.99
	TP 4-5-6 FF	Silver Gold Bronze White Black Special	9552.01 9552.02 9552.03 9552.06 9552.09 9552.99

			Box (x1)
~	TP 2-3-4	Silver	9072.01
TP FF-PR	FF-PR	Gold	9072.02
ᄔ		Bronze	9072.03
_		White	9072.06
Η.		Black	9072.09
		Special	9072.99
	TP 4-5-6	Silver	9572.01
	FF-PR	Gold	9572.02
		Bronze	9572.03
		White	9572.06
		Black	9572.09
		Special	9572.99



Retaining brake FR

Packaging: 24 units box / 12 units blister

		Box (x1)	Blister (x1)
FR 0	Silver Gold Bronze White Black Special	0012.01 0012.02 0012.03 0012.06 0012.09 0012.99	0013.01 0013.02 0013.03 0013.06 0013.09 0013.99
	SST All SST	0012.05 0012.15	0013.05 0013.15
FR1	Silver Gold Bronze White Black Special	0112.01 0112.02 0112.03 0112.06 0112.09 0112.99	0113.01 0113.02 0113.03 0113.06 0113.09 0113.99
	SST All SST	0112.05 0112.15	0113.05 0113.15
FR 2	Plata Oro Bronce Blanco Negro Especial	0212.01 0212.02 0212.03 0212.06 0212.09 0212.99	0213.01 0213.02 0213.03 0213.06 0213.09 0213.99
	SST All SST	0212.05 0212.15	0213.05 0213.15
FR 3	Silver Gold Bronze White Black Special SST All SST	0312.01 0312.02 0312.03 0312.06 0312.09 0312.99 0312.05 0312.15	0313.01 0313.02 0313.03 0313.06 0313.09 0313.99 0313.05 0313.15
FROG	Silver Gold Bronze White Black Special	0022.01 0022.02 0022.03 0022.06 0022.09 0022.99	0023.01 0023.02 0023.03 0023.06 0023.09 0023.99
	SST All SST	0022.05 0022.15	0023.05 0023.15

		Box (x1)	Blister (x1)
FR1G	Silver	0122.01	0123.01
	Gold	0122.02	0123.02
	Bronze	0122.03	0123.03
	White	0122.06	0123.06
	Black	0122.09	0123.09
	Special	0122.99	0123.99
	SST	0122.05	0123.05
	ALL SST	0122.15	0123.15
FR 2 G	Silver	0222.01	0223.01
	Gold	0222.02	0223.02
	Bronze	0222.03	0223.03
	White	0222.06	0223.06
	Black	0222.09	0223.09
	Special	0222.99	0223.99
	SST	0222.05	0223.05
	ALL SST	0222.15	0223.15
FR 3 G	Plata	0322.01	0323.01
	Oro	0322.02	0323.02
	Bronce	0322.03	0323.03
	Blanco	0322.06	0323.06
	Negro	0322.09	0323.09
	Especial	0322.99	0323.99
	SST	0322.05	0323.05
	ALL SST	0322.15	0323.15



Lift retaining brake RA

-

	~ 0		Box (x1)	
_	RA3G	Gold	I-0331.02	-
RA	RA 4 G	Gold	I-0431.02	-
	RA7G	Silver	I-0731.01	-







CH and TP accessories

CH / TP ACCESSORIES		Arm tube CH 35-95	Silver Gold Bronze White Black SST efect Special	51241.01 51241.02 51241.03 51241.06 51241.09 51241.19 51241.99
	8	Arm tube CH 95-155	Silver Gold Bronze White Black SST efect Special	51242.01 51242.02 51242.03 51242.06 51242.09 51242.19 51242.99
		Arm tube TP 95-175	Silver Gold Bronze White Black Special	59037.01 59037.02 59037.03 59037.06 59037.09 59037.99
		Lever rod PR 30-80	Silver Gold Bronze White Black SST efect Special	51345.01 51345.02 51345.03 51345.06 51345.09 51345.19 51345.99
		U adapter glass door CH1	Silver Gold Bronze White Chrome Black SST efect Special	51220.01 51220.02 51220.03 51220.06 51220.07 51220.09 51220.19 51220.99
		U adapter glass door CH4	Silver Gold Bronze White Chrome Black SST efect Special	51416.01 51416.02 51416.03 51416.06 51416.07 51416.09 51416.19 51416.99
		U adapter glass door TP	Silver Gold Bronze White Chrome Black Special	59033.01 59033.02 59033.03 59033.06 59033.07 59033.09 59033.99

Adapted plate TP	Silver Gold Bronze White Black	59240.01 59240.02 59240.03 59240.06 59240.09
	Black Special	59240.09 59240.99

FR accessories

LESSORIES		Standard hook	Silver Gold Bronze White Black	50110.01 50110.02 50110.03 50110.06 50110.09
ک ک			SST	76204.05
Y.		Short hook	Silver Gold Bronze White Black	50128.01 50128.02 50128.03 50128.06 50128.09
			SST	50128.05
		Special flat hook	Silver Gold Bronze White Black	50123.01 50123.02 50123.03 50123.06 50123.09
			SST	76253.05
	0 0 0	Supplement hook	Chrome	50131.07
	00000	Fitting plate for hook	Silver Gold Bronze White Black	50140.01 50140.03 50140.03 50140.06 50140.09
		Bracket for sliding door	Silver Gold Bronze White Black	50141.01 50141.02 50141.03 50141.06 50141.09



Antipanic reversible modular

9			Box (x1)
_	AP1	White Black Grey	A-7010.06 A-7010.09 A-7010.16
	AP 2	White Black Grey	A-7020.06 A-7020.09 A-7020.16
	AP 3	White Black Grey	A-7030.06 A-7030.09 A-7030.16
	Horizontal bar 950 mm	Silver Black Red Green	A-7120.01 A-7120.09 A-7120.11 A-7120.13
	Horizontal	SST Silver	A-7120.05 A-7121.01
	bar 1150 mm	Black Red Green	A-7121.09 A-7121.11 A-7121.13
		SST	A-7121.05
	Horizontal bar 1450 mm	Silver Black Red Green	A-7122.01 A-7122.09 A-7122.11 A-7122.13
		SST	A-7122.05



Box (x1)

PB 1 840 mm	Black / Black Black / Red Black / Silver	A-6011.09 A-6011.12 A-6011.17
PB 1 1170 mm	Black / Black Black / Red Black / Silver	A-6012.09 A-6012.12 A-6012.17
PB 2 840 mm	Black / Black Black / Red Black / Silver	A-6021.09 A-6021.12 A-6021.17
PB 2 1170 mm	Black / Black Black / Red Black / Silver	A-6022.09 A-6022.12 A-6022.17
PB 3 840 mm	Black / Black Black / Red Black / Silver Steel finish	A-6031.09 A-6031.12 A-6031.17 A-6031.18
PB 3 1170 mm	Black / Black Black / Red Black / Silver Steel finish	A-6032.09 A-6032.12 A-6032.17 A-6032.18
	PB 1 1170 mm PB 2 840 mm PB 2 1170 mm PB 3 840 mm	840 mm Black / Red Black / Silver PB 1 l170 mm Black / Black / Black / Black / Silver PB 2 Black / Black / Black / Silver Black / Black / Black / Red Black / Silver PB 2 Black / Black / Black / Silver Black / Black / Black / Silver PB 3 Black / Black / Black / Silver Steel finish Black / Black / Black / Silver PB 3 Black / Black / Silver Steel finish Black / Silver

AP and PB accessories

AP / PB ACCESSORIES



Handle outside trim

Open/closed	White	A-7100.06
,	Black	A-7100.09
	Grey	A-7100.16
Open/closed	White	A-7101.06
(same keys)	Black	A-7101.09
,	Grey	A-7101.16
Universal	White	A-7108.06
	Black	A-7108.09
	Grey	A-7108.16
Universal	White	A-7105.06
(same keys)	Black	A-7105.09
,	Grey	A-7105.16



Oval handle outside trim

White	A-7106.06
Black	A-7106.09
Grey	A-7106.16
White	A-7107.06
Black	A-7107.09
Grey	A-7107.16
White	A-7109.06
Black	A-7109.09
Grey	A-7109.16
White	A-7103.06
Black	A-7103.09
Grey	A-7103.16
White	A-7150.06
Black	A-7150.09
Grey	A-7150.16
	Black Grey White Black



Outer - A-7212 cylinder lock

ħ	Π.	Vertical	White	A-7110.06
	ļ.	rods and	Black	A-7110.09
		latch bolts	Grey	A-7110.16
		<2,66 m	Steel finish	A-7110.18
		Vertical rods	White	A-7115.06
		and lateral	Black	A-7115.09
Ů	Ň	latch bolts	Grey	A-7115.16
		<2,66 m	Steel finish	A-7115.18

AP and PB spare parts

ARTS	6	Floor strike	-	A-7200
PARE	O O	Side strike	-	A-7205
AP / PB SPARE PARTS		Adjustable side strike	-	A-7207
		Cylinder only for 7100	-	A-7210
		Cylinder same keys	-	A-7211



Sliding bolt (13 x 10 mm)

Box (x20)

X	M362 100 mm	Gold brass SST Nickel-plated	M-362109.04 M-362109.05 M-362109.37
	M362 120 mm	Gold brass SST Nickel-plated	M-362129.04 M-362129.05 M-362129.37
	M362 160 mm	Gold brass SST Nickel-plated	M-362169.04 M-362169.05 M-362169.37



72

Sliding bolt (16 x 10 mm)

	U		Box (x20)
¥.	M360 150 mm	Gold brass SST SST 316 Nickel-plated	M-360159.04 M-360159.05 M-360159.35 M-360159.37
	M360 200 mm	Gold brass SST SST 316 Nickel-plated	M-360209.04 M-360209.05 M-360209.35 M-360209.37
	M360 250 mm	Gold brass SST SST 316 Nickel-plated	M-360259.04 M-360259.05 M-360259.35 M-360259.37
	M360 300 mm	Gold brass SST SST 316 Nickel-plated	M-360309.04 M-360309.05 M-360309.35 M-360309.37
	M360 400 mm	Gold brass SST SST 316 Nickel-plated	M-360409.04 M-360409.05 M-360409.35 M-360409.37
	M360 500 mm	Gold brass SST SST 316 Nickel-plated	M-360509.04 M-360509.05 M-360509.35 M-360509.37



Sliding flush bolt (16 x 10 mm)

	U		Box (x20)
Ϋ́	M359	SST	M-359159.05
	150 mm	SST 316	M-359159.35
	M359	SST	M-359209.05
	200 mm	SST 316	M-359209.35
	M359	SST	M-359259.05
	250 mm	SST 316	M-359259.35
	M359	SST	M-359309.05
	300 mm	SST 316	M-359309.35
	M359	SST	M-359409.05
	400 mm	SST 316	M-359409.35
	M359	SST	M-359509.05
	500 mm	SST 316	M-359509.35




Sliding flush bolt (16 x 10 mm) CR

	U		Box (x20)
Ϋ́	M368	SST	M-368159.05
	150 mm	SST 316	M-368159.35
	M368	SST	M-368209.05
	200 mm	SST 316	M-368209.35
	M368	SST	M-368259.05
	250 mm	SST 316	M-368259.35
	M368	SST	M-368309.05
	300 mm	SST 316	M-368309.35
	M368	SST	M-368409.05
	400 mm	SST 316	M-368409.35
	M368	SST	M-368509.05
	500 mm	SST 316	M-368509.35



Receiver bolt with spring

			Box (x20)
X	M391	SST Brass	M-3919.05 M-3919.34
		Nickel-plated	M-3919.37







Adjustable Negro W-3210.09



Hand-free door opener

			Blister (x1)
CO · AC	Hand-free door opener	Grey	3313.16

OJustor





www.justor.com

OJustor

Talleres Trepat S.A.

Zona industrial "Els Garrofers" Avda. del Progrés, 40 08340 Vilassar de Mar (Barcelona) SPAIN

> T. +34 937 540 600 E +34 937 540 601

domestic sales department

trepatventas@justor.com

export department

ttrepatexport@justor.com

www.justor.com